



POLYMER SHELVING SYSTEM

STATIONARY UNITS	HIGH-DENSITY UNITS	MOBILE UNITS
HEAVY STORAGE NEEDS	DAILY FREQUENT DELIVERY	

**MULTI ENVIROMENTS USE
FROM 30°C TO 88°C**



SGS



Dynamic Shelving are made from durable high quality food-grade polymer and are able to meet with international food-safety and hygiene standards.

They are easily adjustable, versatile and easy to clean. The slatted shelving modules can be lifted off and washed from time to time.

Moreover, Dynamic Shelving is a modular system that allows flexibility to assemble storage shelving in any area.

The key components, including posts, post connectors, traverses and shelf plates, are available in a variety of sizes.

They can be easily configured to custom build shelving to maximize storage space.



Storage System Reference



SGS




Anti-rust, anti-corrosion and health standards come together seamlessly for the lasted in commercial food service shelving by Dynamic.

Dynamic Shelving can meet the most exacting requirements of commercial food service operations.

This book will help you choosing the ideal storage shelvings in everywhere for storage.

STORAGE AREAS	High volume foodservice operations with constant loading and off-loading of heavy products. Frequent and/or multiple daily deliveries. Wet storage - Walk-in Freezers, Chillers, Ware washing Areas Dry Storage - Bulk Foods, Catering Equipment, China/Dishware, Linen, Merchandising, Housekeeping, Floor Pantries, etc.
RECOMMENDED MARKET SEGMENTS	Hotels and Casinos, Restaurant, Quick-Serve Restaurants, School, College and Universities, Healthcare, Military, Convention Centers/Stadiums, Cruise Ships, Caterers and Banquet Centers, Corporate Dining, Convenience and Grocery Stores
PRODUCT MATERIAL	Posts and traverses are made from a steel core with smooth food-grade polypropylene exterior. Superior strength and durable enough to withstand the heaviest loading demands.
ASSEMBLY	Molded in removable lift-off sections means fewer parts, making it the easiest to assemble.
LIFETIME WARRANTY AGAINST RUST AND CORROSION	Shelf plates, Stationary Posts and Traverses
SHELF LENGTHS	910, 1060, 1220, 1370, 1525, 1825 mm
SHELF DEPTHS	355, 455, 530, 610 mm
POST HEIGHTS	Stationary Unit 1600, 1800, 2000 mm Mobile Unit (includes casters) ; 1755, 1955 mm
MOBILE UNITS	YES
HIGH DENSITY STORAGE FLOOR TRACK SYSTEM	YES
BOTTOM SHELF DUNNAGE STAND	YES



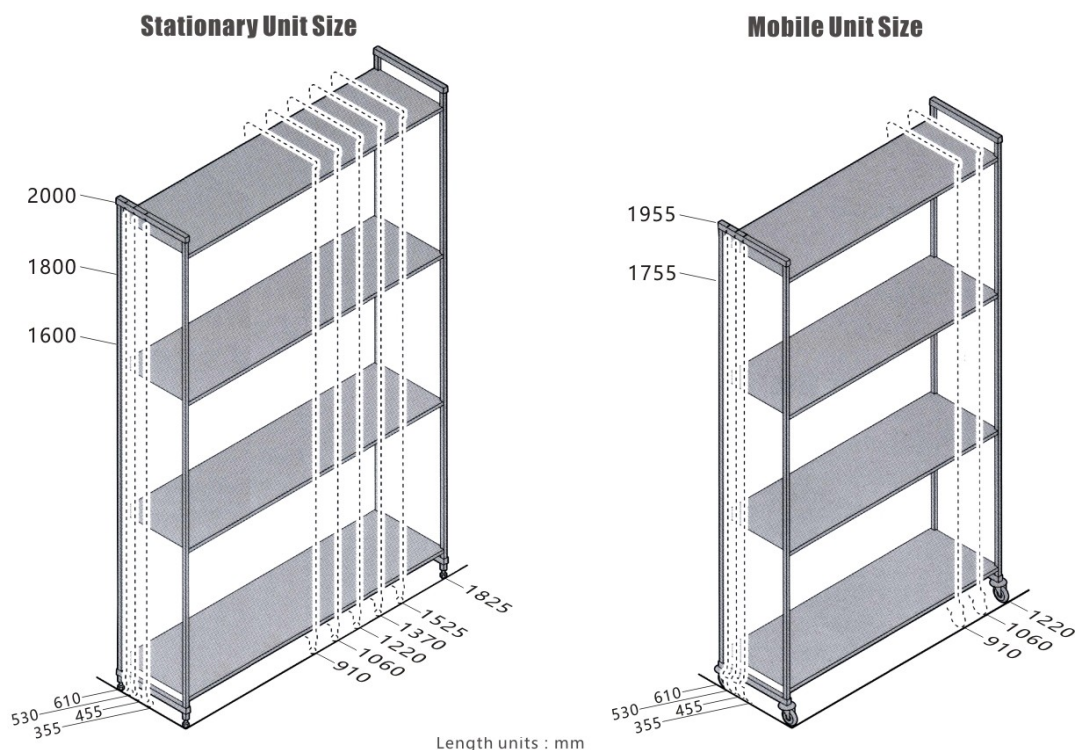


4 SHELF UNIT WEIGHT BEARING CHART



*Dunnage stands add stability and increase weight bearing capacity on bottom shelf only . Add to any shelf length. Highly recommended for Starter Unit 1370mm and longer, all corner units, U-shape units and the units specified for heavier loads.

** Due to the weight bearing capacity of Casters. Maximum weight load on an entire mobile unit is 340kgs.

Maximize Space Utilization



Components have been thoughtfully designed to maximize storage space, even in space-restricted areas.

Starter Unit


All kinds of shelving parts can be combined to various basic units with different specifications, and to be formed a unified body by combination of basic units.



Vented Basic Unit




Solid Basic Unit

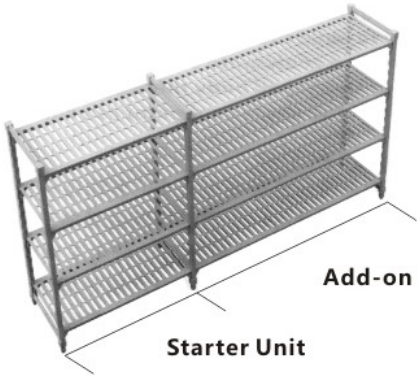

Add-on Unit


Starter Unit

Corner Unit : using the corner connector to make more space available.

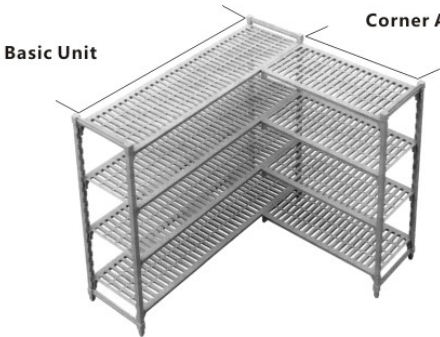

Basic Unit

Corner Add-on Unit

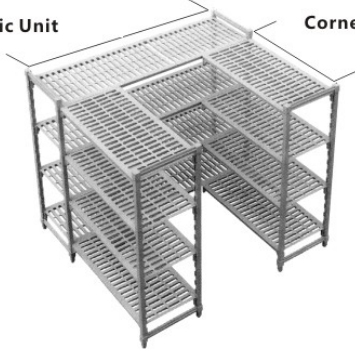

Basic Unit

Corner Add-on Unit



Mobile Unit

Using special-purpose post to move shelf and insert casters, mobile units can be built by shelving units. Mobile units make the store area more convenient. Mobile units are not designed to serve as transport carts. Mobile units can also be installed as “high-density shelving units” or as “compact shelving units” to save space and provide for additional shelving space in small areas.

DUNNAGE RACKS


Keep frozen, cold or dry inventory 12" (30.5 cm) safely off the floor. One piece construction and sturdy legs provide strength and stability. Heavy duty polypropylene is safe to -36°F (-38°C), and will not rust, corrode or bend. Choose slotted tops for maximum air circulation around perishable products.

Code	JD-RS30	JD-RS36	JD-RS48	JD-RS60
Name	Dunnage Racks			
Product Size(cm)	30×53.3×76	30×53.3×91.5	30×53.3×122	30×53.3×152.5
Load Capacity	600 kg	600 kg	1200 kg	1200 kg



Overall Length of Environmental Shelvings Series - Reference Guide



Straight Unit: Starter Unit + Add-on Unit (with shared post)

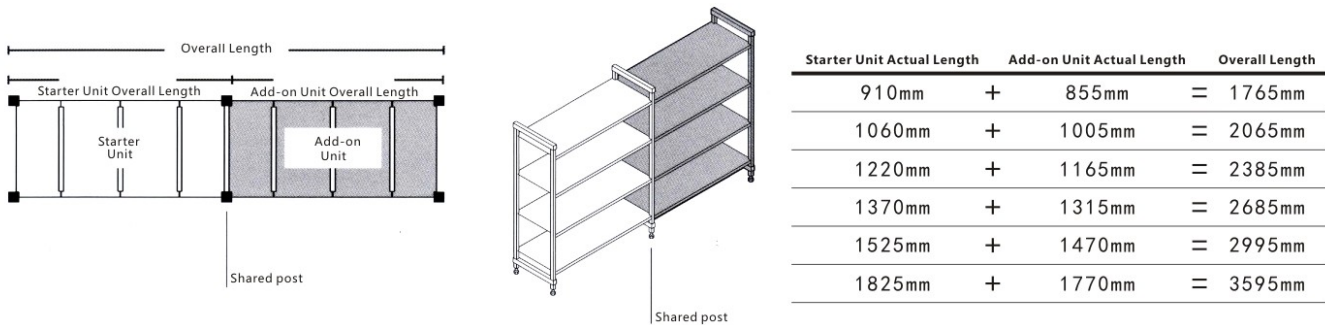

Add-on Unit
When adding on to a basic unit, the traverses on the first and second unit share the middle post. As a result, only two additional posts, instead of four posts or any add-on clips are needed. This simplifies assembly and reduces costs without any loss of weight bearing capacity.

Corner Unit: Starter Unit + Add-on Unit (with Corner connectors)



Corner Unit and U Shape Units:
Using one set corner connector on each shelf that can stand on the basic of 90° angle to connect with the add on unit. Corner connect or can be also used to build the U-shaped units by connecting with each shelf of two basic units. Traverses snap onto the corner connector same as they snap on to dovetail the post.

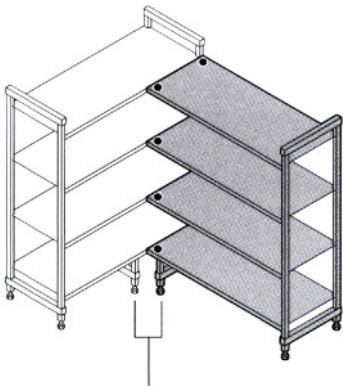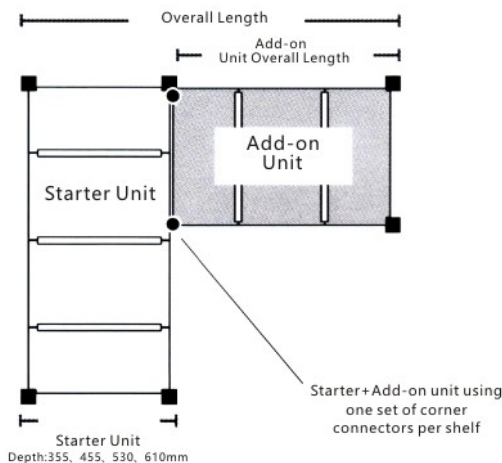

Using one Dunnage Stand under each Starter and Add-on Unit.

U-shape Unit: Two Starter Unit + Intermediate Unit (with shared post)

Corner Unit and U Shape Units
Using one set corner connector on each shelf that can stand on the basic of 90° angle to connect with the add on unit. Corner connect or can be also used to build the U-shaped units by connecting with each shelf of two basic units. Traverses snap onto the corner connector same as they snap on to dovetail the post.

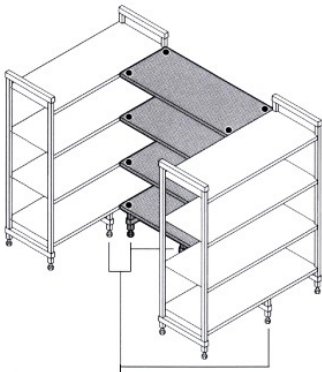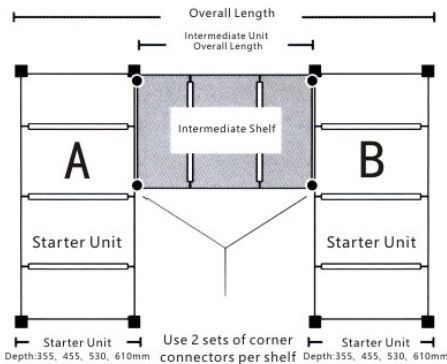


Using four Dunnages Stand, one under each Starter Unit and two under the bottom Intermediate Shelf.


FITTINGS

Post Connectors

Post Connectors can hold two posts together and specify the width of the unit. Marked with a obvious top and bottom symbol makes quick identification.

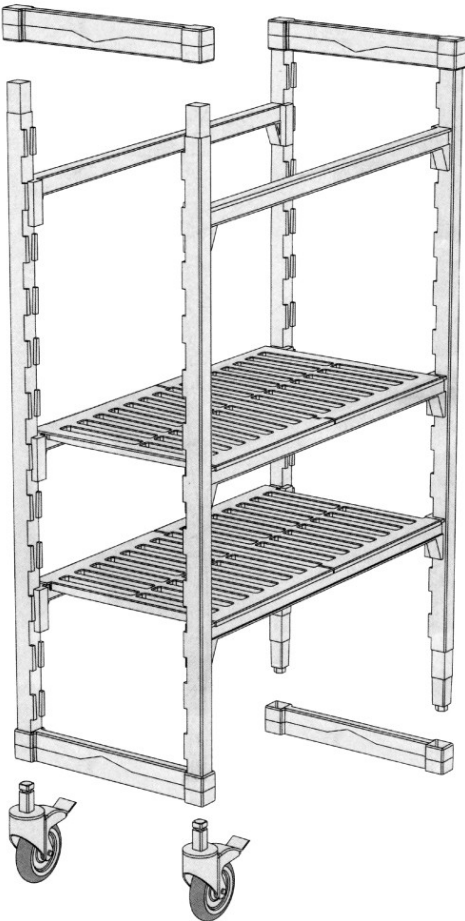

Casters



We have the standard casters for dry storage applications as well as for the cold, clammy advanced caster applications.



Mobile Unit

Post for Mobile Unit.

Stationary Post kits And Accessories

Contains two posts and one set top and bottom post connector.



Traverses

Steel core inside and Polypropylene surface can provide strength and durability.

Traverses connect to the sliding on to the joint on the post, two traverses can build one shelf and specify the length of the unit.



Shelf Plates

Made of Polypropylene which is easy clean and dishwasher safe.



Shelf kit


Includes two traverses and shelf plates for matching the length of traverses.



Solid Shelf Kits



Vented Shelf Kits



Post Of Starter Unit

Steel core inside and Polypropylene surface can provide strength and durability.




Starter Unit

Post of Starter Unit.



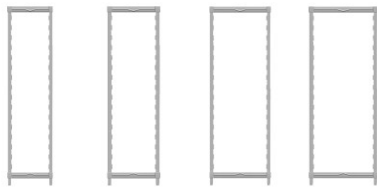

Stationary Post kits And Accessories




		355mm	455mm	530mm	610mm
Height	Width	14"	18"	21"	24"
1600mm	Item NO.	JSPK1464	JSPK1864	JSPK2164	JSPK2464
64"	KG/ m³ Case kg/Cube m³	6.06/0.015	6.28/0.015	6.48/0.015	6.62/0.015
1800mm	Item NO	JSPK1472	JSPK1872	JSPK2172	JSPK2472
72"	KG/ m³ Cass kg/Cube m³	6.72/0.016	6.94/0.016	7.14/0.016	7.28/0.016
2000mm	Item NO	JSPK1480	JSPK1880	JSPK2180	JSPK2480
80"	KG/ m³ Cass kg/Cube m³	7.76/0.0182	7.98/0.0182	8.18/0.0182	8.32/0.0182

Casters

Casters		
	127mm	127mm
Direction	5°	5°
Item NO	JD-HSLC1	JD-HSLC2
Explanation	With Break	Without Break


Dunnage Stand

Recommended be used for heavy products,when the length of the unit no shorter than1380mm, and the bearing weight arrive at 450kgs.




Shelf Plates

Shelf plate is made of Polypropylene, vented and solid designs are available.

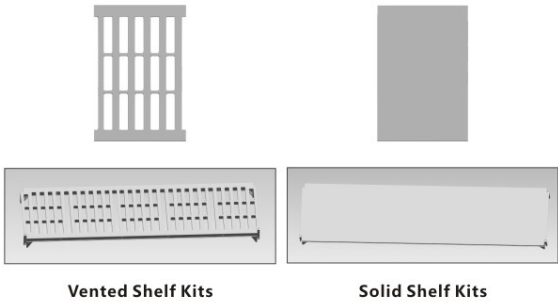

Corner Connector Set

Corner connectors attach a basic unit to a second unit in a 90 degree angle or between two units to form a U shape. A set of corner connectors are needed for each shelf, when using corner connectors weight bearing capacity will decrease to 400ibs(180kg)per shelf . Corner connectors are recommended for use on traverses equal to or shorter than 48"(1220mm)




Corner Connector

Item : JCC (Left & Right)

Post Connectors

Post connectors hold two posts together and define the width of the unit, they are made of polypropylene and provide exceptional cross stabilization.

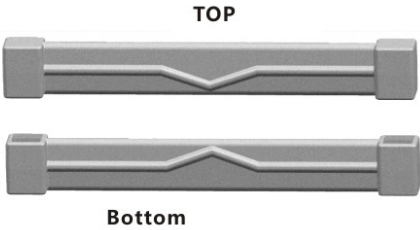

Starter Unit, Add on Unit and Mobile Unit.



Vented Shelf Kits



Width	Length	910mm 36"	1060mm 42"	1220mm 48"	1370mm 54"	1525mm 60"	1825mm 72"
355mm 14"	Item No	JS3614VK	JS4214VK	JS4814VK	JS5414VK	JS6014VK	JS7214VK
	Case kg	4.00	4.61	5.29	6.03	6.72	11.17
455mm 18"	Item No	JS3618VK	JS4218VK	JS4818VK	JS5418VK	JS6018VK	JS7218VK
	Case kg	4.64	5.35	6.17	7.01	7.79	12.48
530mm 21"	Item No	JS3621VK	JS4221VK	JS4821VK	JS5421VK	JS6021VK	JS7221VK
	Case kg	5.01	5.73	6.64	7.49	8.30	13.09
610mm 24"	Item No	JS3624VK	JS4224VK	JS4824VK	JS5424VK	JS6024VK	JS7224VK
	Case kg	5.15	6.01	6.83	7.89	8.75	13.59

Solid Shelf Kits



Width	Length	910mm 36"	1060mm 42"	1220mm 48"	1370mm 54"	1525mm 60"	1825mm 72"
455mm 18"	Item No	JS3618SK	JS4218SK	JS4818SK	JS5418SK	JS6018SK	JS7218SK
	Case kg	4.77	5.52	6.32	7.21	8.05	12.41
530mm 21"	Item No	JS3621SK	JS4221SK	JS4821SK	JS5421SK	JS6021SK	JS7221SK
	Case kg	5.02	5.75	6.66	7.52	7.69	13.12
610mm 24"	Item No	JS3624SK	JS4224SK	JS4824SK	JS5424SK	JS6024SK	JS7224SK
	Case kg	5.35	6.18	7.13	8.08	9.00	13.93

Vented Starter Units



**HEIGHT
1600mm
64"**

Width	Length	910mm 36"	1060mm 42"	1220mm 48"	1370mm 54"	1525mm 60"	1825mm 72"
355mm 14"	Item No	JSU361464	JSU421464	JSU481464	JSU541464	JSU601464	JSU721464
	Case kg/Cube m ³	24.91/0.078	27.35/0.093	30.07/0.097	33.03/0.112	35.79/0.117	53.59/0.145
455mm 18"	Item No	JSU361864	JSU421864	JSU481864	JSU541864	JSU601864	JSU721864
	Case kg/Cube m ³	27.85/0.086	30.69/0.102	33.97/0.107	37.33/0.124	40.45/0.130	59.21/0.156
530mm 21"	Item No	JSU362164	JSU422164	JSU482164	JSU542164	JSU602164	JSU722164
	Case kg/Cube m ³	29.79/0.098	32.67/0.116	36.31/0.128	39.71/0.147	42.95/0.148	62.11/0.185
610mm 24"	Item No	JSU362464	JSU422464	JSU482464	JSU542464	JSU602464	JSU722464
	Case kg/Cube m ³	30.63/0.105	34.07/0.115	37.37/0.138	41.59/0.158	45.03/0.159	64.39/0.2

Vented Add-On Units



**HEIGHT
1600mm
64"**

Width	Length	910mm 36"	1060mm 42"	1220mm 48"	1370mm 54"	1525mm 60"	1825mm 72"
355mm 14"	Item No	JSA361464	JSA421464	JSA481464	JSA541464	JSA601464	JSA721464
	Case kg/Cube m ³	20.46/0.078	22.90/0.093	25.62/0.097	28.58/0.112	31.34/0.117	49.14/0.145
455mm 18"	Item No	JSA361864	JSA421864	JSA481864	JSA541864	JSA601864	JSA721864
	Case kg/Cube m ³	23.21/0.086	26.05/0.102	29.33/0.107	32.69/0.124	35.81/0.130	54.57/0.156
530mm 21"	Item No	JSA362164	JSA422164	JSA482164	JSA542164	JSA602164	JSA722164
	Case kg/Cube m ³	24.92/0.098	27.80/0.116	31.44/0.128	34.84/0.147	38.08/0.148	57.24/0.185
610mm 24"	Item No	JSA362464	JSA422464	JSA482464	JSA542464	JSA602464	JSA722464
	Case kg/Cube m ³	25.62/0.105	29.06/0.115	32.34/0.138	36.44/0.158	40.02/0.159	59.38/0.200

Vented Starter Units



**HEIGHT
1800mm
72"**

Width	Length	910mm 36"	1060mm 42"	1220mm 48"	1370mm 54"	1525mm 60"	1825mm 72"
355mm 14"	Item No	JSU361472	JSU421472	JSU481472	JSU541472	JSU601472	JSU721472
	Case kg/Cube m ³	25.87/0.080	28.31/0.095	31.03/0.099	33.99/0.114	36.75/0.119	54.55/0.147
455mm 18"	Item No	JSU361872	JSU421872	JSU481872	JSU541872	JSU601872	JSU721872
	Case kg/Cube m ³	28.81/0.088	31.27/0.104	34.93/0.109	38.29/0.126	41.41/0.132	60.17/0.158
530mm 21"	Item No	JSU362172	JSU422172	JSU482172	JSU542172	JSU602172	JSU722172
	Case kg/Cube m ³	30.75/0.100	33.63/0.118	37.27/0.130	40.67/0.149	43.91/0.150	63.07/0.187
610mm 24"	Item No	JSU362472	JSU422472	JSU482472	JSU542472	JSU602472	JSU722472
	Case kg/Cube m ³	31.59/0.107	35.03/0.117	38.31/0.140	42.55/0.160	45.99/0.161	65.35/0.202





**HEIGHT
1800mm
72"**

Vented Add-On Units

Width	Length	910mm 36"	1060mm 42"	1220mm 48"	1370mm 54"	1525mm 60"	1825mm 72"
355mm 14"	Item No	JSA361472	JSA421472	JSA481472	JSA541472	JSA601472	JSA721472
	Case kg/Cube m³	20.94/0.080	23.38/0.095	26.10/0.099	29.06/0.114	31.82/0.119	49.62/0.147
455mm 18"	Item No	JSA361872	JSA421872	JSA481872	JSA541872	JSA601872	JSA721872
	Case kg/Cube m³	23.69/0.088	26.53/0.104	29.81/0.109	33.17/0.126	36.29/0.132	55.05/0.158
530mm 21"	Item No	JSA362172	JSA422172	JSA482172	JSA542172	JSA602172	JSA722172
	Case kg/Cube m³	25.40/0.100	28.28/0.118	31.92/0.130	35.32/0.149	38.56/0.150	57.72/0.187
610mm 24"	Item No	JSA362472	JSA422472	JSA482472	JSA542472	JSA602472	JSA722472
	Case kg/Cube m³	26.10/0.107	29.54/0.117	32.82/0.140	37.06/0.160	40.05/0.161	59.86/0.202



**HEIGHT
2000mm
80"**

Vented Starter Units

Width	Length	910mm 36"	1060mm 42"	1220mm 48"	1370mm 54"	1525mm 60"	1825mm 72"
355mm 14"	Item No	JSU361480	JSU421480	JSU481480	JSU541480	JSU601480	JSU721480
	Case kg/Cube m³	26.75/0.083	29.19/0.098	31.91/0.102	34.87/0.117	37.63/0.122	55.43/0.150
455mm 18"	Item No	JSU361880	JSU421880	JSU481880	JSU541880	JSU601880	JSU721880
	Case kg/Cube m³	29.69/0.091	32.53/0.107	35.81/0.112	39.17/0.129	42.29/0.135	61.05/0.161
530mm 21"	Item No	JSU362180	JSU422180	JSU482180	JSU542180	JSU602180	JSU722180
	Case kg/Cube m³	31.63/0.103	34.51/0.121	38.15/0.133	41.55/0.152	44.79/0.153	63.95/0.190
610mm 24"	Item No	JSU362480	JSU422480	JSU482480	JSU542480	JSU602480	JSU722480
	Case kg/Cube m³	32.47/0.110	35.91/0.120	39.19/0.143	43.43/0.163	46.87/0.164	66.23/0.205



**HEIGHT
2000mm
80"**

Vented Add-On Units

Width	Length	910mm 36"	1060mm 42"	1220mm 48"	1370mm 54"	1525mm 60"	1825mm 72"
355mm 14"	Item No	JSA361480	JSA421480	JSA481480	JSA541480	JSA601480	JSA721480
	Case kg/Cube m³	21.38/0.083	23.82/0.098	26.54/0.102	29.50/0.117	32.26/0.122	50.06/0.150
455mm 18"	Item No	JSA361880	JSA421880	JSA481880	JSA541880	JSA601880	JSA721880
	Case kg/Cube m³	24.13/0.091	26.97/0.107	30.25/0.112	33.61/0.129	36.73/0.135	55.49/0.161
530mm 21"	Item No	JSA362180	JSA422180	JSA482180	JSA542180	JSA602180	JSA722180
	Case kg/Cube m³	25.84/0.103	28.72/0.121	32.36/0.133	35.76/0.152	39.00/0.153	58.16/0.190
610mm 24"	Item No	JSA362480	JSA422480	JSA482480	JSA542480	JSA602480	JSA722480
	Case kg/Cube m³	26.54/0.110	29.98/0.120	33.26/0.143	37.50/0.163	40.94/0.164	60.30/0.205



**HEIGHT
1600mm
64"**

Solid Starter Units

Width	Length	910mm 36"	1060mm 42"	1220mm 48"	1370mm 54"	1525mm 60"	1825mm 72"
455mm 18"	Item No	JSS361864	JSS421864	JSS481864	JSS541864	JSS601864	JSS721864
	Case kg/Cube m³	27.98/0.086	30.86/0.102	34.12/0.107	37.53/0.124	40.71/0.130	59.14/0.156
530mm 21"	Item No	JSS362164	JSS422164	JSS482164	JSS542164	JSS602164	JSS722164
	Case kg/Cube m³	29.8/0.098	32.69/0.116	36.33/0.128	39.74/0.147	42.34/0.148	62.14/0.185
610mm 24"	Item No	JSS362464	JSS422464	JSS482464	JSS542464	JSS602464	JSS722464
	Case kg/Cube m³	30.83/0.105	34.24/0.115	37.65/0.138	41.78/0.158	45.28/0.159	64.73/0.200



HEIGHT
1600mm
64"

Solid Add-On Units

Width	Length	910mm 36"	1060mm 42"	1220mm 48"	1370mm 54"	1525mm 60"	1825mm 72"
455mm 18"	Item No	JSD361864	JSD421864	JSD481864	JSD541864	JSD601864	JSD721864
	Case kg/Cube m³	23.34/0.086	26.22/0.102	29.48/0.107	32.89/0.124	36.07/0.130	54.50/0.156
530mm 21"	Item No	JSD362164	JSD422164	JSD482164	JSD542164	JSD602164	JSD722164
	Case kg/Cube m³	24.93/0.098	27.82/0.116	31.46/0.128	34.87/0.147	37.92/0.148	57.27/0.185
610mm 24"	Item No	JSD362464	JSD422464	JSD482464	JSD542464	JSD602464	JSD722464
	Case kg/Cube m³	25.82/0.105	29.23/0.115	32.64/0.138	36.63/0.158	40.27/0.159	59.72/0.200



HEIGHT
1800mm
72"

Solid Starter Units

Width	Length	910mm 36"	1060mm 42"	1220mm 48"	1370mm 54"	1525mm 60"	1825mm 72"
455mm 18"	Item No	JSS361872	JSS421872	JSS481872	JSS541872	JSS601872	JSS721872
	Case kg/Cube m³	28.94/0.088	31.44/0.104	35.08/0.109	38.49/0.126	41.67/0.132	60.10/0.158
530mm 21"	Item No	JSS362172	JSS422172	JSS482172	JSS542172	JSS602172	JSS722172
	Case kg/Cube m³	30.76/0.100	33.65/0.118	37.29/0.130	40.70/0.149	43.30/0.150	63.10/0.187
610mm 24"	Item No	JSS362472	JSS422472	JSS482472	JSS542472	JSS602472	JSS722472
	Case kg/Cube m³	31.79/0.107	35.20/0.117	38.61/0.140	42.74/0.160	46.24/0.161	65.69/0.202



HEIGHT
1800mm
72"

Solid Add-On Units

Width	Length	910mm 36"	1060mm 42"	1220mm 48"	1370mm 54"	1525mm 60"	1825mm 72"
455mm 18"	Item No	JSD361872	JSD421872	JSD481872	JSD541872	JSD601872	JSD721872
	Case kg/Cube m³	23.82/0.088	26.70/0.104	29.96/0.109	33.37/0.126	36.55/0.132	54.98/0.158
530mm 21"	Item No	JSD362172	JSD422172	JSD482172	JSD542172	JSD602172	JSD722172
	Case kg/Cube m³	25.41/0.100	28.30/0.118	31.94/0.130	35.35/0.149	37.95/0.150	57.75/0.187
610mm 24"	Item No	JSD362472	JSD422472	JSD482472	JSD542472	JSD602472	JSD722472
	Case kg/Cube m³	26.30/0.107	29.71/0.117	33.12/0.140	37.25/0.160	40.30/0.161	60.20/0.202



HEIGHT
2000mm
80"

Solid Starter Units

Width	Length	910mm 36"	1060mm 42"	1220mm 48"	1370mm 54"	1525mm 60"	1825mm 72"
455mm 18"	Item No	JSS361880	JSS421880	JSS481880	JSS541880	JSS601880	JSS721880
	Case kg/Cube m³	29.82/0.091	32.70/0.107	35.96/0.112	39.37/0.129	42.55/0.135	60.98/0.161
530mm 21"	Item No	JSS362180	JSS422180	JSS482180	JSS542180	JSS602180	JSS722180
	Case kg/Cube m³	31.64/0.103	34.53/0.121	38.17/0.133	41.58/0.152	44.18/0.153	63.98/0.190
610mm 24"	Item No	JSS362480	JSS422480	JSS482480	JSS542480	JSS602480	JSS722480
	Case kg/Cube m³	32.67/0.110	36.08/0.120	39.49/0.143	43.62/0.163	47.12/0.164	66.57/0.205



HEIGHT
2000mm
80"

Solid Add-On Units

Width	Length	910mm 36"	1060mm 42"	1220mm 48"	1370mm 54"	1525mm 60"	1825mm 72"
455mm 18"	Item No	JSD361880	JSD421880	JSD481880	JSD541880	JSD601880	JSD721880
	Case kg/Cube m³	24.26/0.091	27.14/0.107	30.40/0.112	33.81/0.129	36.99/0.135	55.42/0.161
530mm 21"	Item No	JSD362180	JSD422180	JSD482180	JSD542180	JSD602180	JSD722180
	Case kg/Cube m³	25.85/0.103	28.74/0.121	32.38/0.133	35.79/0.152	38.39/0.153	58.19/0.190
610mm 24"	Item No	JSD362480	JSD422480	JSD482480	JSD542480	JSD602480	JSD722480
	Case kg/Cube m³	26.74/0.110	30.15/0.120	33.56/0.143	37.69/0.163	41.19/0.164	60.64/0.205



DYNAMIC HIGH-DENSITY STORAGE FLOOR TRACK SYSTEM




Dynamic High -Density Shelving maximizes storage capacity by eliminating aisles and utilizing all available space.


This simple system is composed of stationary starter units anchored to a raised floor track system at both ends with a high density mobile unit installed in between.

The track is easy to assemble and no drilling or bonding are needed.

High-Density mobile units provide factory assembled post kits, vented or solid shelf plates, high-density casters and bumpers. Full track and extension kits include all required hardware. Stationary Starter Units are required to anchor the system at both ends.

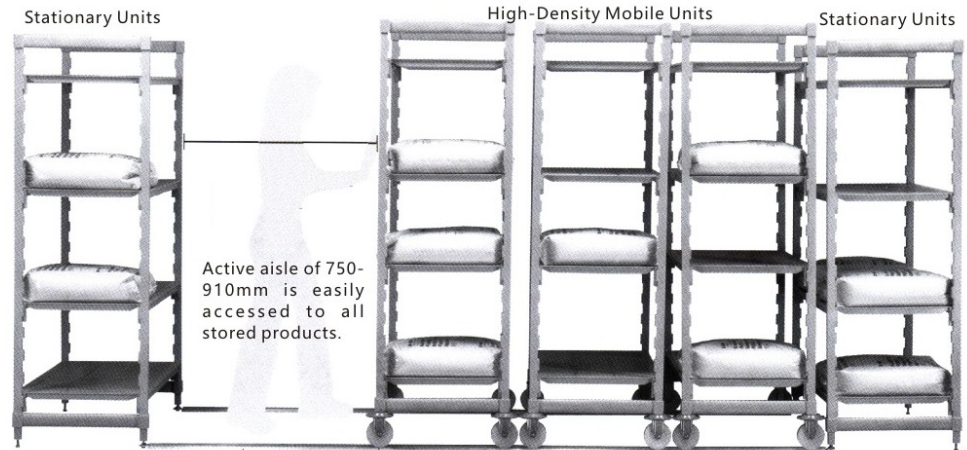



Raised floor track provides a smooth and level surface to easily roll mobile units. It makes sure dirt will not get trapped and is easy to clean. Aluminum track and S/S hardware is rust free.



The raised track simply connects to the bottom of the stationary units and works as a system anchor. No bolts, no glue or drilling into the floor are required. Easy and fast set up.

It's recommended to use a stationary unit for every 4.5M of track to further stabilize the system.

Grooved casters roll easily and securely on raised track.

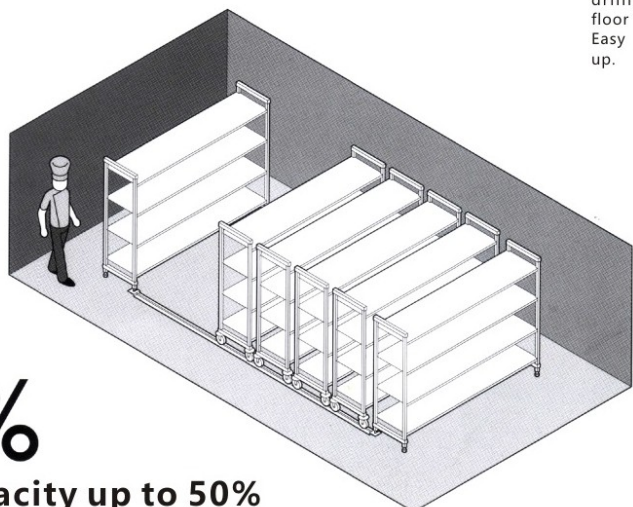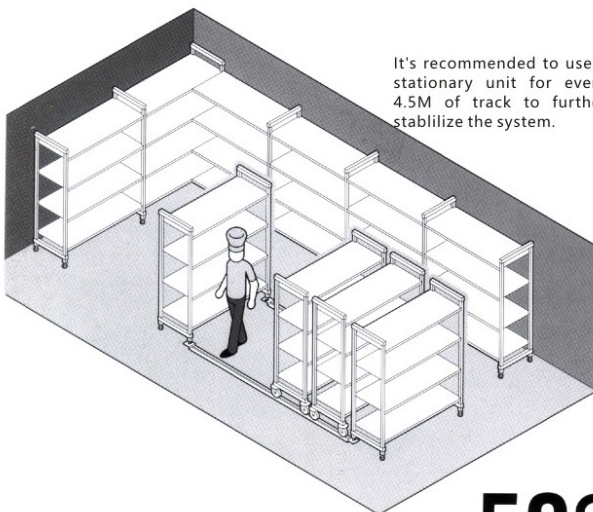

50%

Increases Storage Capacity up to 50%



Imported And Distributed In UAE By:

HARROW INTERNATIONAL FZ-LLC

RAKEZ, Ras Al Khaimah, United Arab Emirates.

Tel # +971-522-986-210 Email: admin@harrow-international.com

